



Your reliable partner for quality plywood

Formwork



Commercial



Packing



WEEGO EXPORT IMPORT JSC.

<https://weegovietnam.com/>

COMPANY PROFILE

➤ Product list

- LVB, LVL, LVD plywood
- Premium plywood (Laminate, Melamine face)
- Commercial plywood (Birch, Poplar, Oak, Okoume, Bintangor face, etc.)
- Packing plywood (Okoume, Bintangor, Magnolia, no face, etc.)
- Formwork plywood (black and brown color)
- Pre-finished boards

➤ Our factory

- 3 factories in all 3 areas of Vietnam
- Established in 2018
- 500 workers in total

➤ Market

- Asia, Africa, America, etc.



➤ Teams

- Marketing
- Sales
- Docs
- QC
- Production






FACTORY CORNER

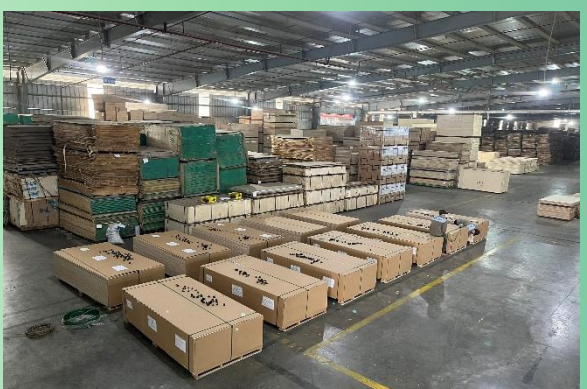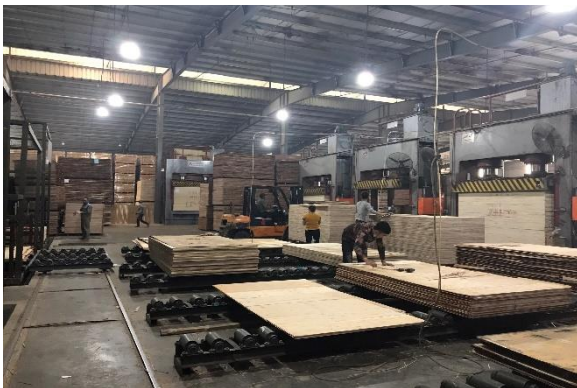

QUALITY CONTROL & PACKING

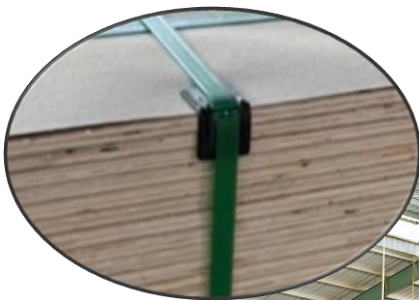


Fortified angled bead



Coverd by carton paper to prevent scratches

COMPANY NAME	WEEGO EXPORT IMPORT JOINT STOCK COMPANY
NAME OF PRODUCT	BINTANGOR PLYWOOD
SIZE	15 x 1220 x 2440 MM
GRADE	AB
QUANTITY	65 SHEET

Detailed specs and quantity

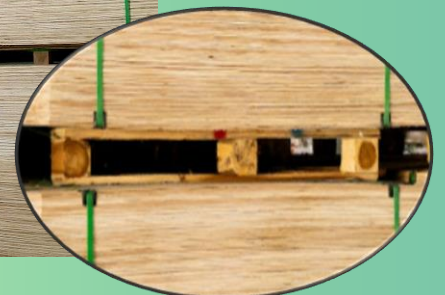

Pallet for easier moving

ALL PLYWOOD STRUCTURES



LVD



LVL



LVB

Material	Acacia, Rubber, Eucalyptus, Combi
Glue	<ul style="list-style-type: none"> • UF, MUF, PF • Formaldehyde emission standard: Super E0, E0
Dimensions	Length x width: 2440 x 1220mm or as request Thickness: 3 – 25mm Tolerance: 0.3 – 0.5mm
Certificate	CARB P2, FSC
Moisture content	Below 14%

BENT PLYWOOD



Material	Rubber, Combi
Glue	Formaldehyde emission standard: E0, E1, E2
Dimensions	Shape and size: Cut to size upon customers' request Tolerance: 0.3 – 0.5mm
Certificate	CARB P2
Moisture content	Below 14%

PREMIUM PLYWOOD



Laminate



Melamine



Face	Laminate, Melamine
Core	Acacia, Rubber, Eucalyptus, Combi
Glue	<ul style="list-style-type: none"> • UF • Formaldehyde emission standard: Super E0, E0
Color	White, grey or as request
Dimensions	Length x width: 2440 x 1220mm or as request Thickness: 5, 9, 12, 18, 19 Tolerance: 0.3 – 0.5mm
Certificate	CARB P2, FSC
Moisture content	Below 14%

COMMERCIAL PLYWOOD



Birch



Poplar



Oak



Okoume



Bintangor

Face	Birch, Poplar, Oak, Okoume, Bintangor
Core	Acacia, Rubber, Styrax, Magnolia, Eucalyptus, Combi
Glue	<ul style="list-style-type: none"> • UF, MUF, Phenol/WBP • Formaldehyde emission standard: Super E0, E0, E1, E2
Dimensions	Length x width: 2440 x 1220mm or as request Thickness: 5-36mm Tolerance: 0.3 – 0.5mm
Certificate	CARB P2, FSC
Moisture content	Below 14%

PACKING PLYWOOD



Okoume



Bintangor




Magnolia




No face

Face	Okoume, Bintangor, Magnolia, Styrax, No face, etc.
Core	Acacia, Rubber, Styrax, Magnolia, Eucalyptus, Combi
Glue	<ul style="list-style-type: none"> • UF, MUF, Phenol/WBP • Formaldehyde emission standard: Super E0, E0, E1, E2
Dimensions	Length x width: 2440 x 1220mm or as request Thickness: 5-36mm Tolerance: 0.3 – 0.5mm
Certificate	CARB P2, FSC
Moisture content	Below 14%

FILM-FACED PLYWOOD

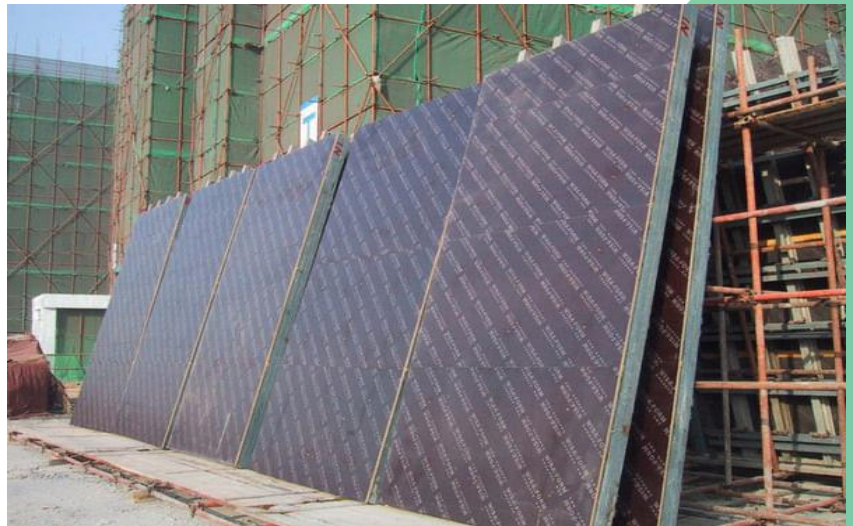

Film face	<ul style="list-style-type: none"> • Brown/Black • Plain/Logo printed
Core	Acacia, Rubber, Eucalyptus, Combi
Glue	<ul style="list-style-type: none"> • MUF, Phenol/WBP • Formaldehyde emission standard: Super E0, E0, E1, E2
Dimensions	Length x width: 2440 x 1220mm or as request Thickness: 5-36mm Tolerance: 0.3 – 0.5mm
Cartificate	CARB P2, FSC
Moisture content	Below 14%

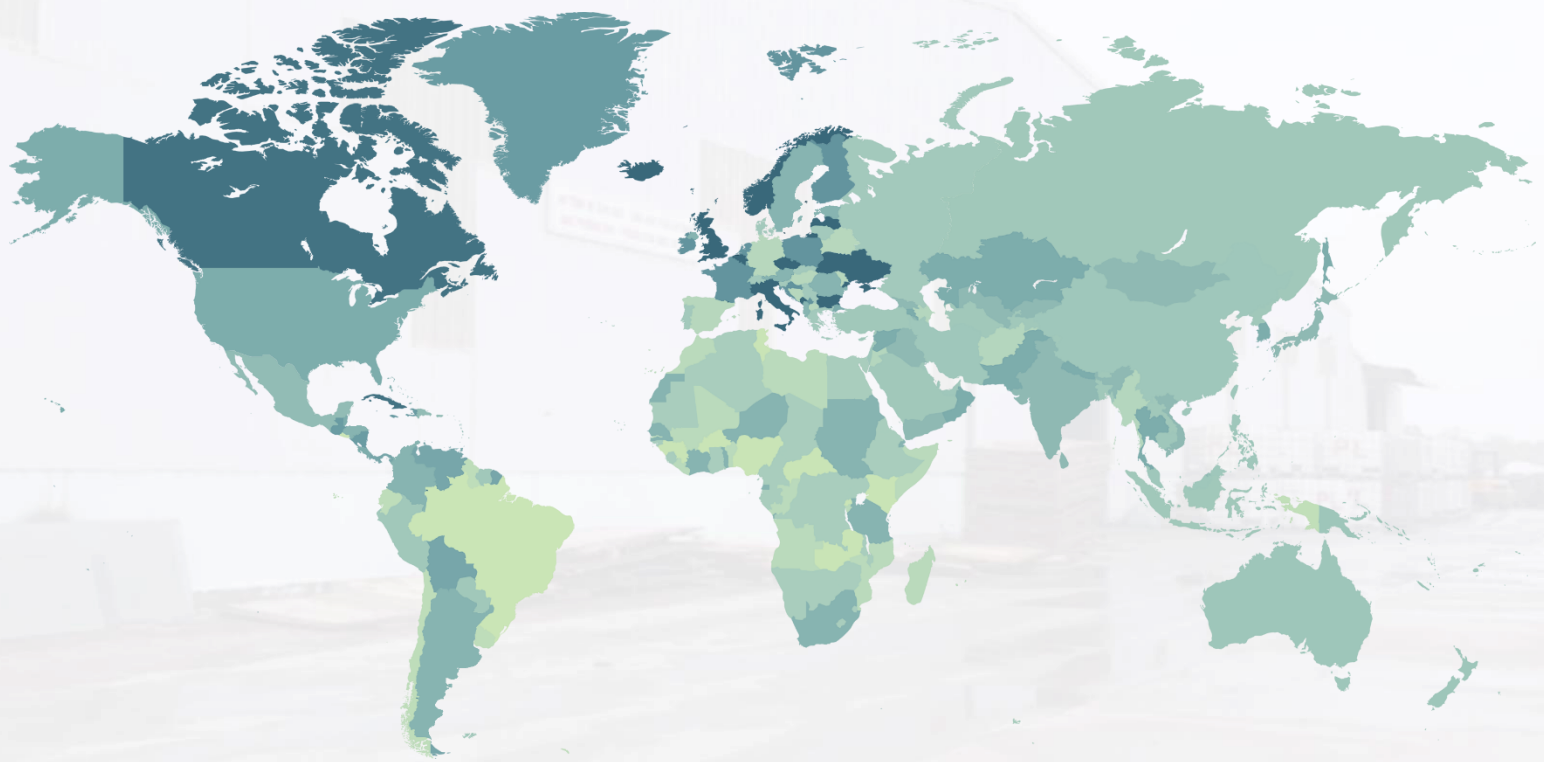

Your reliable partner for quality plywood

WEEGO EXPORT IMPORT JOINT STOCK COMPANY

Office address: 7th Floor, Vietcom Building, 18 Nguyen Chi Thanh, Ba Dinh, Hanoi, Vietnam

Factory address: Ha Hoa, Phu Tho & Bac Dong Hoi IZ, Dong Hoi, Quang Binh, Vietnam

Email: sales@weegovietnam.com

Website: <https://weegovietnam.com/>

Hotline: +84 972 100 203

WEEGO